






IMP Experts



ARCHI


Hidden fastener Wall Panel

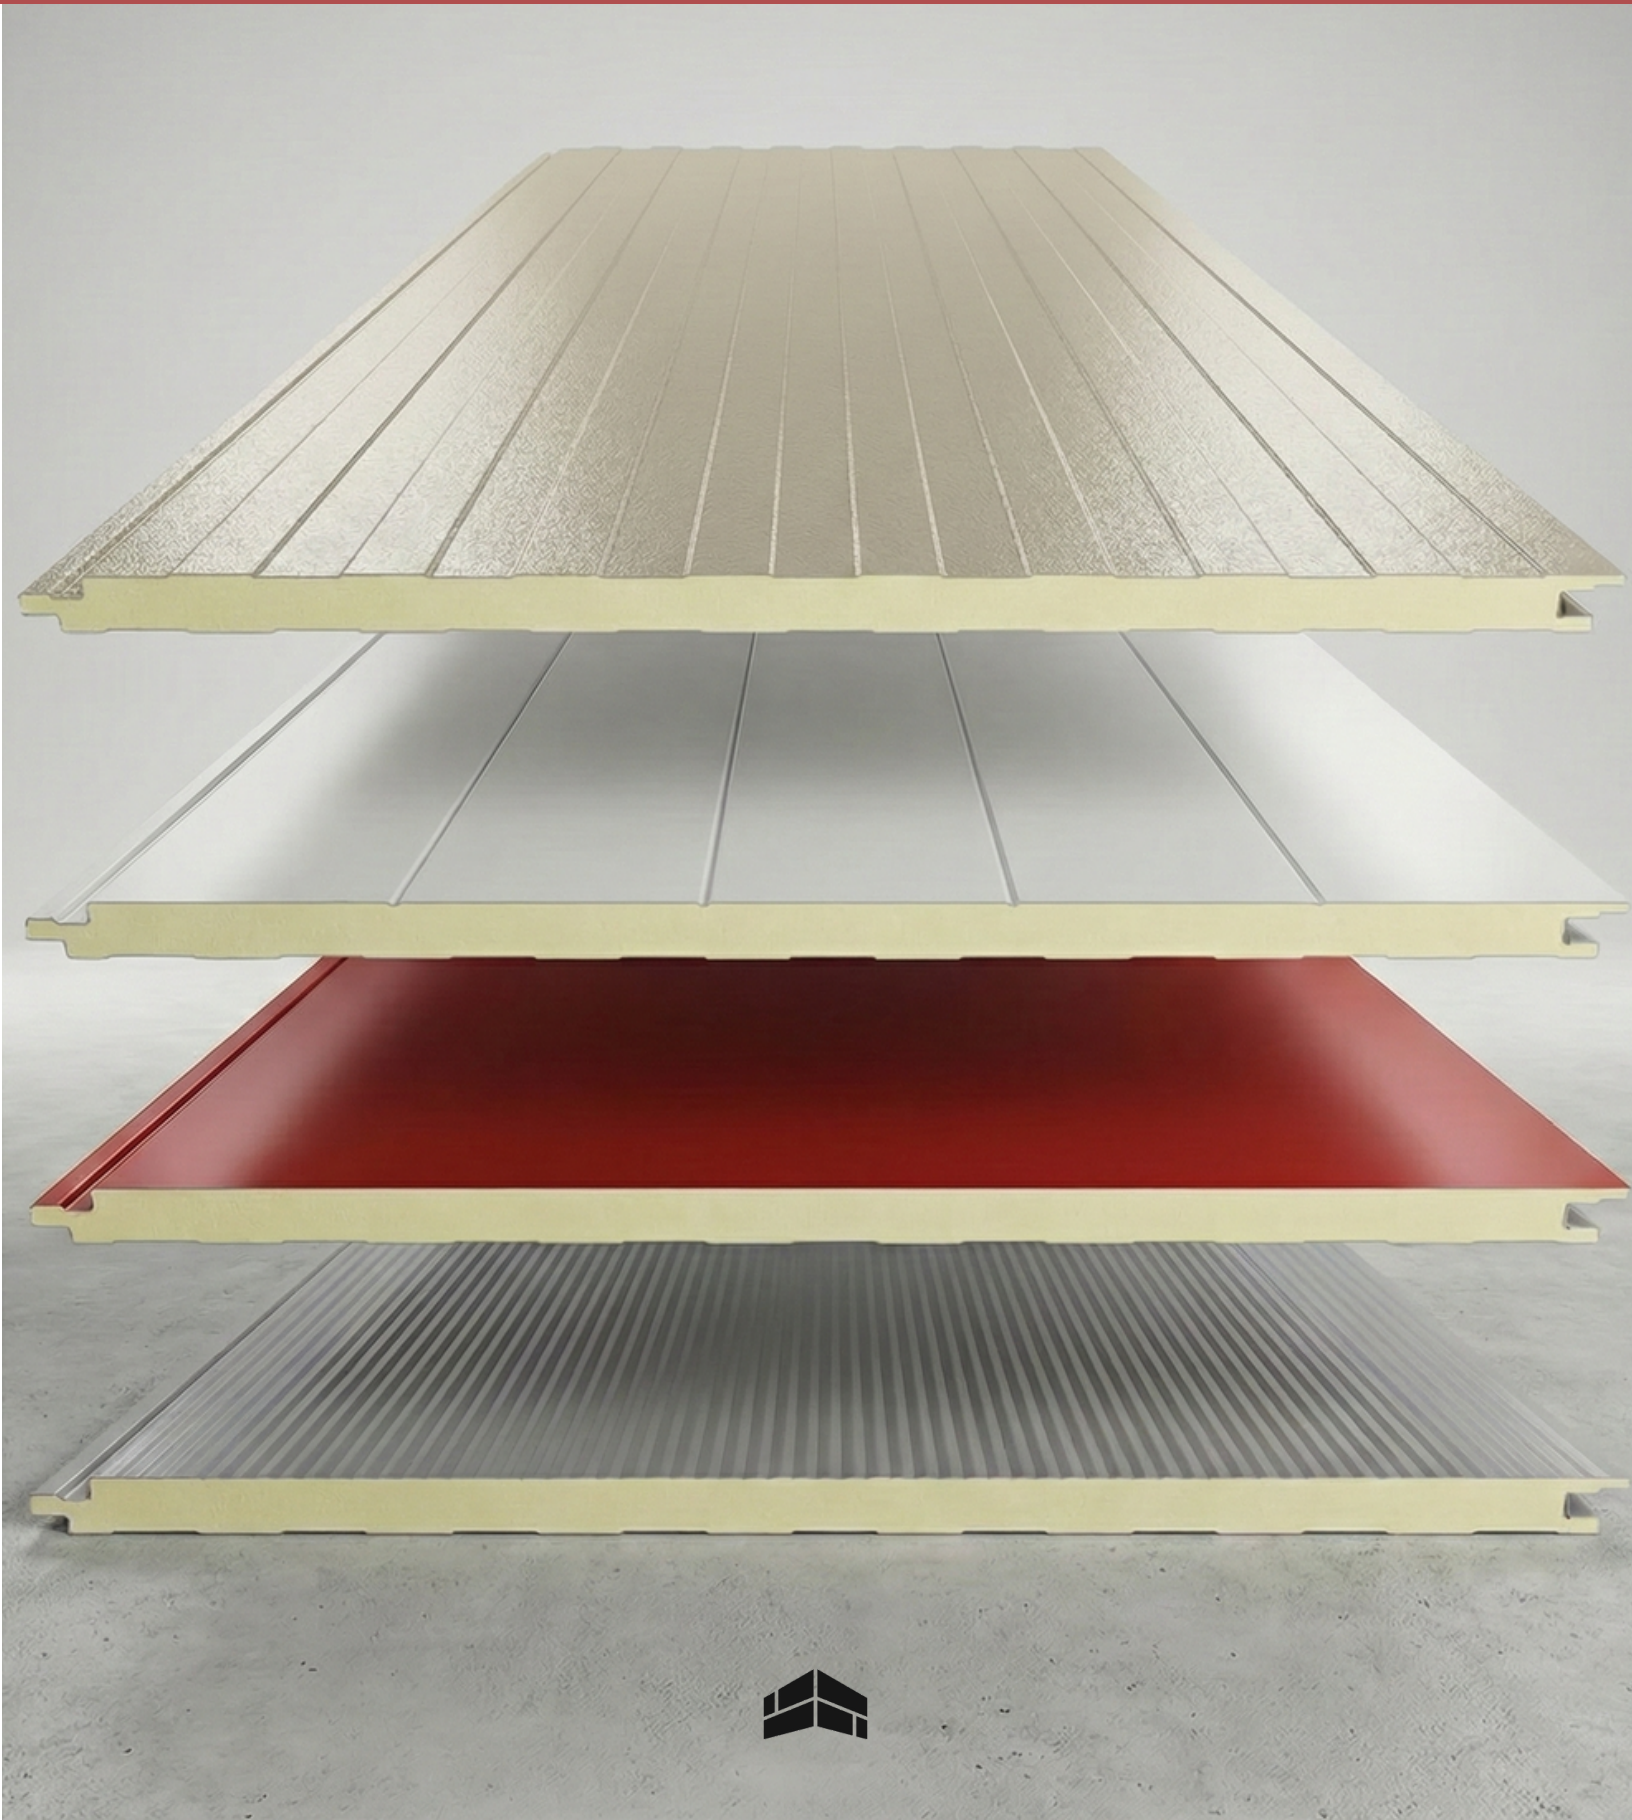

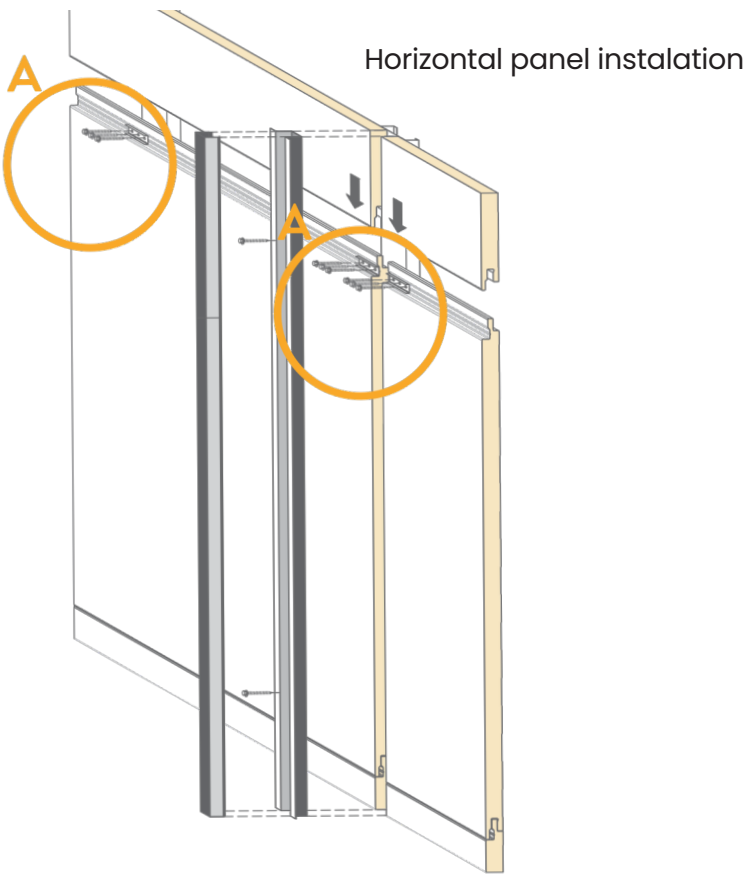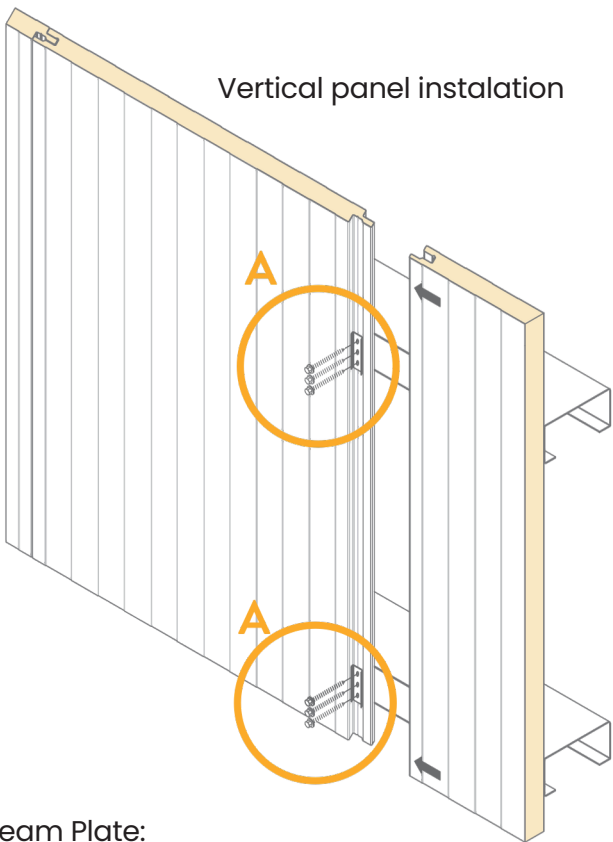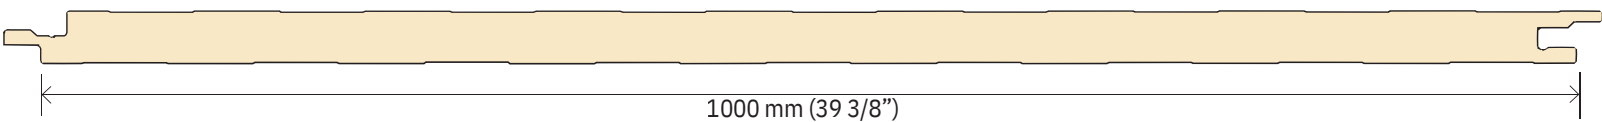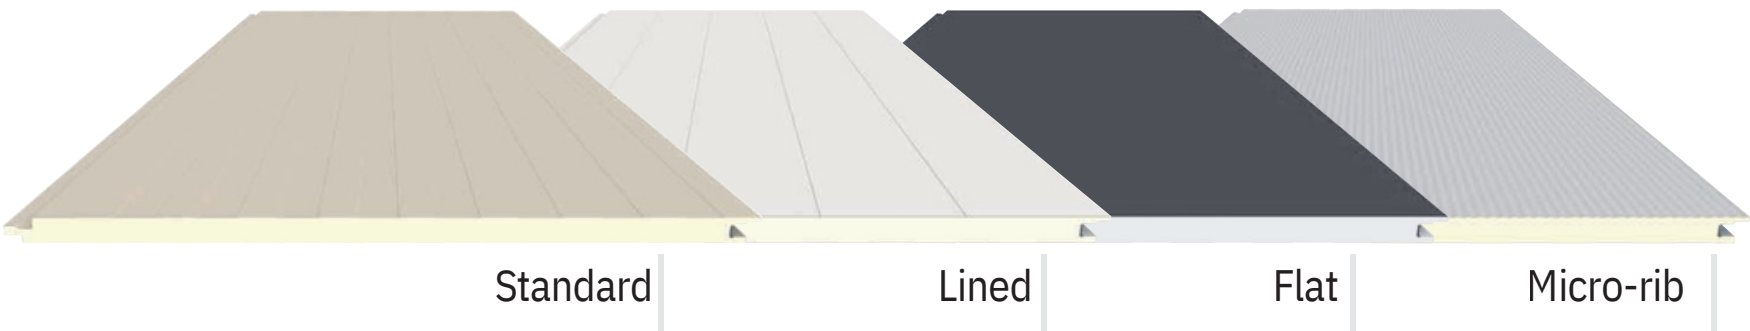

A Seam Plate:

Joint detail.

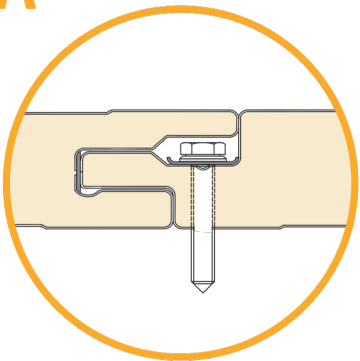

Panel Thickness (mm)	Panel Thickness (inch)	Panel Weight (PSF)	R-Value (Hr ft² °F/BTU)
50	2"	217	13
60	2 3/8"	225	16
80	3"	241	22
100	4"	258	27

Category	Specification	Value / Description
General	Field of Application	Wall panels
	Core Type	Polyisocyanurate (PIR)
	Core Density	40 kg/m³ ±10% (2.3 PCF)
Dimensions	Cover Width	1000 mm (39 3/8")
	Length	Up to 11,900 mm (39 ft.)
Profiles	Outer Ribbing	Standard / Lined / Flat / Micro-rib
	Inner Ribbing	Standard / Flat
Materials	Face Thickness	0.5 mm (26 Gauge) 0.6 mm (24 Gauge) 0.7 mm (22 Gauge)
	Exterior / Interior	G90 galvanized or AZ50 aluminium-zinc coated steel



XIPRE USA
Headquarters
6013 Wesley Grove Blvd
Wesley Chapel, 33544,
Florida, US

www.xipreusa.com
 813 438 3300
 contact@xipreusa.com



6013 Wesley Grove Blvd,
Wesley Chapel, FL, 33544
xipreusa.com
813.438.3300

IMPing™ Your Success

Where IMP meets Innovation

